


# i-Trakll - Long Range VID READER





## i-Trakll - Long Range VID **READER**

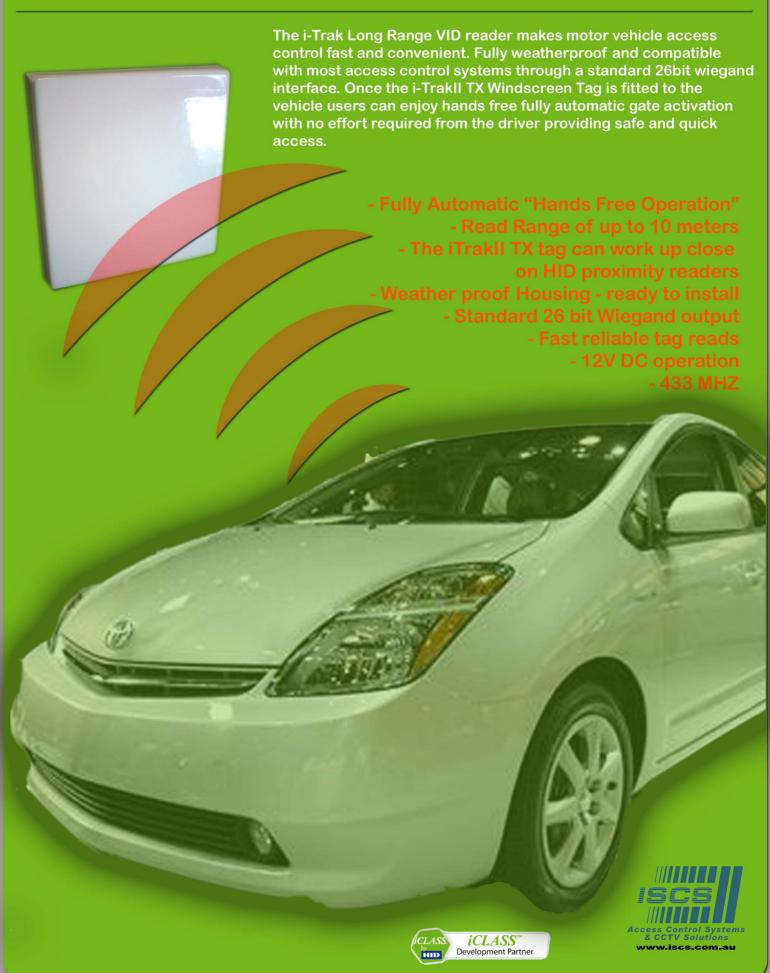

**Transmit Frequency** 

**Operating Temperature** 

Colour

433.92 MHZ

60mm x 29mm x 14mm

-10 to +55 Deg Cel

5g



### Typical window fitment of iTrakII-TX



**Transmit Frequency** 433.92 MHZ

85mm x 55mm x 3mm **Operating Temperature** -10 to +55 Deg Cel

6g Colour Grey

The i-Trak II-TXP also includes a duress button for personal alert. Functionality of the tag is the same as the standard windscreen tag. Both tags can be supplied with an optional HID proximity chip



433.92 MHZ Frequency

400mm x 430mm x 60mm Size

for short range access on HID proximity or iClass readers.

**Operating Temperature** -10 to +55 Deg Cel

Weight 3.5KG Colour White

**Data Output** Wiegand 26BIT, other format available

12V DC, 60mA Voltage

\* Wall mounting bracket included!

Proudly supplied and installed by:



